

KICGR52X



| | |
|----------------------|------------------|
| Product family | Hood |
| Hood Type | Integrated hood |
| Design | Fully integrated |
| Extraction | Extraction |
| Electronic control | Yes |
| Perimeter extraction | Yes |
| Material | Stainless steel |
| Type of steel | Brushed |
| EAN code | 8017709262211 |
| Hood width | 52 cm |



Aesthetics





| | | | |
|-----------|-----------------|-----------|-------------|
| Aesthetic | Universale | Finishing | Satin |
| Colour | Stainless steel | Logo | Silk screen |

Controls



| | | | |
|-----------------|--------------------|---------|---------|
| Control setting | Electronic buttons | Display | 1 a LED |
| Led color | Red | | |

Programme / Functions

| | |
|-------------------------|---|
| No. of speeds | 3 |
| Intensive speed |  |
| 24h air filter function |  |
| Time-setting options |  |
| Auto-Vent |  |

Technical Features



| | | | |
|---------------|---|---------------------|-----------|
| No. of lights | 2 | Anti-grease filters | Aluminium |
|---------------|---|---------------------|-----------|

| | | | |
|------------------------------|-----------------------|------------------------------------|--------|
| Light type | LED | Filter replacement indicator | Yes |
| Light Power | 1 W | Vent outlet | 150 mm |
| Free outlet maximum capacity | 720 m ³ /h | Minimum distance from GAS hob | 650 mm |
| Motor power | 270 W | Minimum distance from ELECTRIC hob | 550 mm |
| No. of filters | 1 | | |

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dB(A)] |
|-----------------|---|------------------------------------|
| Speed 1 | 300 | 57 |
| Speed 2 | 450 | 67 |
| Speed 3 | 600 | 71 |
| Intensive speed | 680 | 73 |

Accessories Included

| | |
|----------------|-----|
| Tube reduction | Yes |
|----------------|-----|

Performance / Energy Label

| A | | | |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood) | 54 kWh/a | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 71 dB(A) |
| Energy efficiency class (EEC) | A | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 73 dB(A) |
| Fluid Dynamic Efficiency (FDE) | 29.2 | Power Consumption in Off mode (Po) | 0.49 W |
| Fluid Dynamic Efficiency class (FDEC) | A | Time increase factor (F) | 0.9 |
| Lighting Efficiency (LE) | 73 lux/W | Energy Efficiency Index | 51.7 |
| Lighting Efficiency Class (LEC) | A | Measured air flow rate at best efficiency point (Qbep) | 382 m ³ /h |
| Grease Filtering Efficiency (GFE) | 75.1 % | Measured air pressure at best efficiency point (Pbep) | 435 Pa |
| Grease Filtering Efficiency Class (GFEC) | C | Measured electric power input at best efficiency point (Wbep) | 158 W |
| Air flow at minumum speed (Qmin) | 300 m ³ /h | Nominal Power consumption of the light system (WL) | 2 W |
| Air flow at maximum speed (Qmax) | 600 m ³ /h | Average illumination of the light on the cooking surface (Emiddle) | 160 lux |
| Air flow at boost speed (Qboost) | 680 m ³ /h | | |
| Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 57 dB(A) | | |

Sound power level at
highest setting (Lwa)

71 dB(A)


Electrical Connection

Electrical connection rating
Voltage

272 W
220-240 V

Frequency (Hz)
Power supply cable
length

50-60 Hz
1500 mm

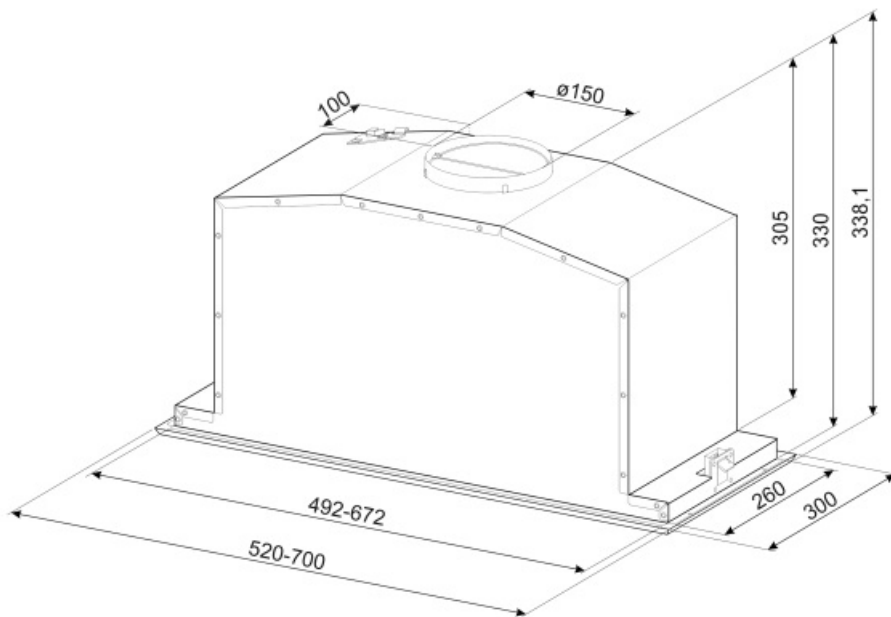

Not included accessories



KITFC152











Charcoal filters Round Kit 2 pieces



KITVENT150

Imbocco motore 150 mm con valvola di non ritorno

Symbols glossary (TT)

| | | | |
|--|---|---|---|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | A: Product drying performance, measured from A+++ to D / G depending on the product family |  | A smart infrared system, which allows a hood and hob with this feature to work together. |
|  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |  | LED display: to show programmes, functions and options selected and the time to the end of the cycle. |
|  | Warning light(s): to advise when filters need changing. |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  | Perimeter extraction panels: very efficient and aid noise reduction. |  | Intensive/turbo setting: when extra fast extraction is required. |