


KSCB94WH



Product family	Hood
Hood Type	Ceiling hood
Design	Ceiling
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709326173
Hood width	90 cm



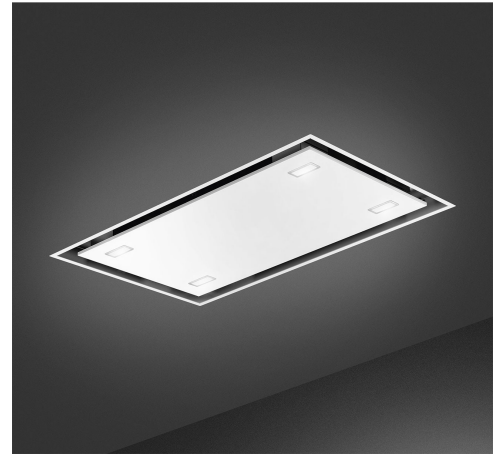



Aesthetics

Aesthetic Colour	Universale Matt White	Finishing Logo	Satin Silk screen
------------------	--------------------------	----------------	----------------------






Controls

Control setting	Touch control back-lighted White
-----------------	-------------------------------------

Programme / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

Technical Features

    	No. of lights	4	No. of filters	2
	Light type	LED	Anti-grease filters	Stainless steel
	Light Power	2,3 W		
	Dimmer mode	Yes		

Light color temperature scale (°K)	3000 °K	Filter replacement indicator	Yes
Light color temperature range	2700° - 4000° °K	Vent outlet	150 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from GAS hob	750 mm
Motor power	275 W	Minimum distance from ELECTRIC hob	650 mm
		Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	268	45
Speed 2	360	55
Speed 3	624	65
Intensive speed	798	70

Accessories Included

Remote control	Yes
----------------	-----

Performance / Energy Label

A*

Annual Efficiency Consumption (AEChood)	45 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	66 dB(A)
Energy efficiency class (EEC)	A+	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dB(A)
Fluid Dynamic Efficiency (FDE)	35.3	Power consumption in stand-by mode (Ps)	0.49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.7
Lighting Efficiency (LE)	26.6 lux/W	Energy Efficiency Index	43.8
Lighting Efficiency Class (LEC)	B	Measured air flow rate at best efficiency point (Qbep)	407 m³/h
Grease Filtering Efficiency (GFE)	51.6 %	Measured air pressure at best efficiency point (Pbep)	472 Pa
Grease Filtering Efficiency Class (GFEC)	F	Measured electric power input at best efficiency point (Wbep)	151 W
Air flow at minumum speed (Qmin)	268 m³/h	Nominal Power consumption of the light system (WL)	9 W
Air flow at maximum speed (Qmax)	624 m³/h		
Air flow at boost speed (Qboost)	798 m³/h		
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	45 dB(A)		


Average illumination of the light on the cooking surface (E _{middle})	245 lux
Sound power level at highest setting (L _{wa})	66 dB(A)

Electrical Connection

Electrical connection rating	285 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

Also available

Alternative colours available	Stainless steel	Available colours	KSCB94X
-------------------------------	-----------------	-------------------	---------

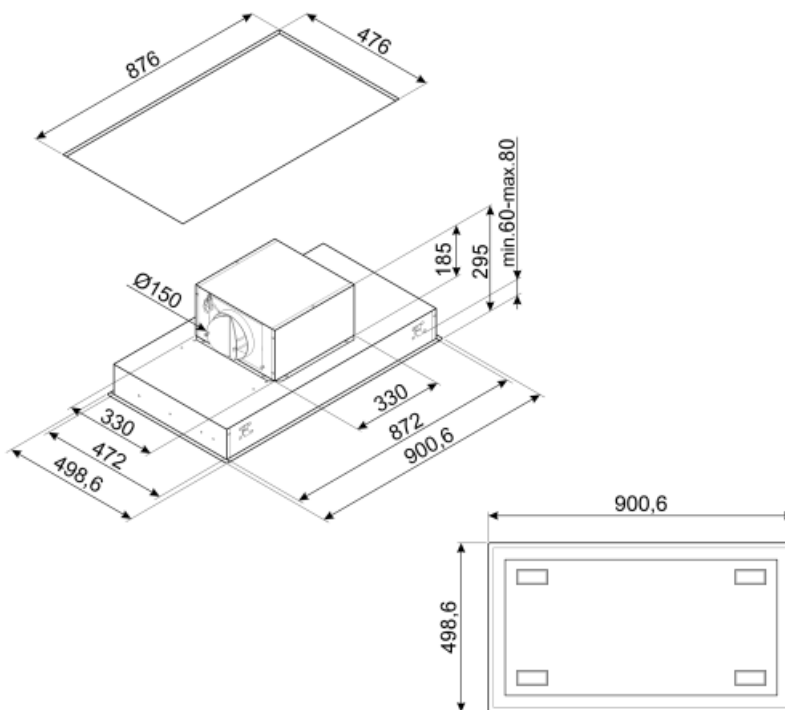

Not included accessories



FLT6












Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary (TT)

- | | | | |
|---|---|---|--|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed. |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Connection between hob and hood |  | Warning light(s): to advise when filters need changing. |
|  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |  | Perimeter extraction panels: very efficient and aid noise reduction. |
|  | Intensive/turbo setting: when extra fast extraction is required. |  | Dimmering Lights |
|  | Tunable white from warm to cold | | |