

# PGF30T-1



Product Family	Hob
Built-in type	Ultra-low profile
Dimensions	30 cm
Power supply	Electric
Type	Teppanyaki
EAN code	8017709161910



## Aesthetics



Aesthetic	Classica
Colour	Stainless steel
Finishing	Satin
Material	Stainless Steel
Type of steel	Brushed
Type of control setting	Control knobs
Control knob position	Front
No. of controls	2
Controls colour	Steel effect
Serigraphy colour	Black

## Programme / Functions


Total no. of cook zones	2
No. of induction cook zones	2
Power levels	9

## Options



Worktop Cut-Out	494x292 mm	Cleaning option	Yes
Control Lock / Child Safety	Yes		

## Technical Features



Front-centre - Teppanyaki - 1.40 kW - Booster 1.80 kW

Rear-centre - Teppanyaki - 1.40 kW - Booster 1.80 kW

Automatic switch off when overheat Yes

Residual heat indicator Yes

## Electrical Connection

Electrical connection rating (W) 3000 W


Current 13 A

Voltage (V) 220-240 V

Type of electric cable installed Yes, Single phase

Frequency (Hz) 50/60 Hz

Power supply cable length 120 cm

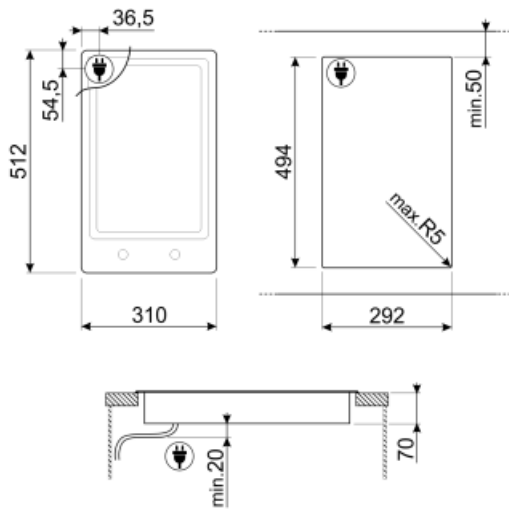

---

## Not included accessories

---



**LGPGF-1**

Aluminium connecting strip for PGF

**6MP1PGF**






6 Linea knobs for PGF hobs



---

## Symbols glossary (TT)

---

- |  |   |   |   |
|--|---|---|---|
|  | Ultra-low profile: Installation of product with flat edge - height of 1 mm.   |  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.  |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |
|  | Knobs control   |   |   |