

VZP76N

Sink material Composite Composite bowl Type

No. of bowls

EAN code 8017709294038



Aesthetics





Aesthetic Universale On overflow Logo

Alternative colours Serie Quadra Dove Gray, White, Cemento

available / Concrete Colour Black

Tap hole / precut tap No Taphole Building in type Standard, Undermount hole

	Bowl type	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner bowl	Overflow	Strainer position	Strainer dimension
Bowl	Minimum radius	700 x 400 x 215	215	10	Yes, flush fitted	Wall position	3.5"

Technical Features

















Characteristics composite material

Antibacterial, Anti-scratch, Termal schock resistant, High temperatures

resistant, Impact resistant, Easy to clean, UV Resistant

215x756x456 mm

Height from kitchen top 6 mm Base unit size 80 cm No. of clips

Type of clips Standard + undermount clip

Dimensions of the product (mm)

Cutout dimension

topmount (mm) **Cutout dimension**

undermount (mm)

746x446 mm

700x400 mm

SMEG SPA 23/8/2023




Undermount cutout radius

10 mm

Accessories Included

Accessories for installation

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips

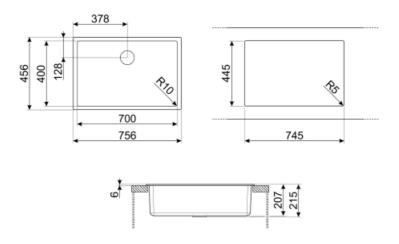

SMEG SPA 23/8/2023



Not included accessories



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



COL36

St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



MATROL

Stainless steel drainer 405 x 340 mm



COL19H

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm



COL19

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



CB25MN

Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



DBSINT34

St/steel drain basket to fit STD radius composite sinks 340 x 400 mm bowl, 180 mm depth



COLPTX

Draining rack base 300 x 185 x 82 mm



CB28QU

Single HPL chopping board for miminum radius, oak, measures 280 x 418 H 12 mm

SMEG SPA 23/8/2023



Symbols glossary (TT)



Antibacterial



Cupboard width required for sink installation



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets



Easy to clean



Termal schock resistant



UV protection, does not fade over time.



Antiscratch



Sink depth - depending on the model, the depth can be from 13 to 24,5



Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.



High temperatures resistant



Impact resistant

SMEG SPA 23/8/2023