

# KSGT74X

|                    |                  |
|--------------------|------------------|
| Product family     | Hood             |
| Hood Type          | Integrated hood  |
| Design             | Fully integrated |
| Extraction         | Extraction       |
| Electronic control | Yes              |
| Material           | Stainless steel  |
| Type of steel      | Brushed          |
| EAN code           | 8017709328351    |
| Hood width         | 75 cm            |








## Aesthetics

|                  |                               |                |                   |
|------------------|-------------------------------|----------------|-------------------|
| Aesthetic Colour | Universale<br>Stainless steel | Finishing Logo | Satin<br>Embossed |
|------------------|-------------------------------|----------------|-------------------|

## Controls

|                 |                                     |           |       |
|-----------------|-------------------------------------|-----------|-------|
| Control setting | Touch control back-lighted<br>White | Led color | White |
|-----------------|-------------------------------------|-----------|-------|

## Programme / Functions

|                         |   |
|-------------------------|---|
| No. of speeds           | 3   |
| Intensive speed         |  |
| 24h air filter function |  |
| Time-setting options    |  |
| Auto-vent 2.0           |  |
| V-Condense System       |  |

## Technical Features

|  |               |     |                     |                 |
|--|---------------|-----|---------------------|-----------------|
|      | No. of lights | 2   | No. of filters      | 2               |
|  | Light type    | LED | Anti-grease filters | Stainless steel |

|                               |                  |                                    |        |
|-------------------------------|------------------|------------------------------------|--------|
| Light Power                   | 2,3 W            | Filter replacement indicator       | Yes    |
| Dimmer mode                   | Yes              | Vent outlet                        | 150 mm |
| Light color temperature range | 2700° - 4000° °K | Minimum distance from GAS hob      | 650 mm |
| Free outlet maximum capacity  | 820 m³/h         | Minimum distance from ELECTRIC hob | 500 mm |
| Motor power                   | 275 W            | Non return valve                   | Yes    |

|                 | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dB(A)] |
|-----------------|----------------------------------|------------------------------------|
| Speed 1         | 254                              | 48                                 |
| Speed 2         | 442                              | 61                                 |
| Speed 3         | 603                              | 68                                 |
| Intensive speed | 657                              | 70                                 |

## Performance / Energy Label

|          |  |            |  |          |
|----------|--|------------|--|----------|
| <b>A</b> | Annual Efficiency Consumption (AEChood)  | 48 kWh/a   | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 69 dB(A) |
|          | Energy efficiency class (EEC)  | A          | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 70 dB(A) |
|          | Fluid Dynamic Efficiency (FDE)   | 30.3       | Power consumption in stand-by mode (Ps)  | 0.49 W   |
|          | Fluid Dynamic Efficiency class (FDEC)  | A          | Time increase factor (F)   | 0.9      |
|          | Lighting Efficiency (LE)   | 42.6 lux/W | Energy Efficiency Index  | 51.8     |
|          | Lighting Efficiency Class (LEC)  | A          | Measured air flow rate at best efficiency point (Qbep)                         | 329 m³/h |
|          | Grease Filtering Efficiency (GFE)  | 87.2 %     | Measured air pressure at best efficiency point (Pbep)                          | 448 Pa   |
|          | Grease Filtering Efficiency Class (GFEC)                                       | B          | Measured electric power input at best efficiency point (Wbep)                  | 135 W    |
|          | Air flow at minumum speed (Qmin)   | 254 m³/h   | Nominal Power consumption of the light system (WL)                             | 5 W      |
|          | Air flow at maximum speed (Qmax)   | 603 m³/h   | Average illumination of the light on the cooking surface (Emiddle)             | 196 lux  |
|          | Air flow at boost speed (Qboost)   | 657 m³/h   | Sound power level at highest setting (Lwa)                                     | 69 dB(A) |
|          | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 48 dB(A)   |  |          |

## Electrical Connection

Electrical connection rating  
Voltage


280 W

220-240 V

Frequency (Hz)  
Power supply cable length

50-60 Hz

1500 mm

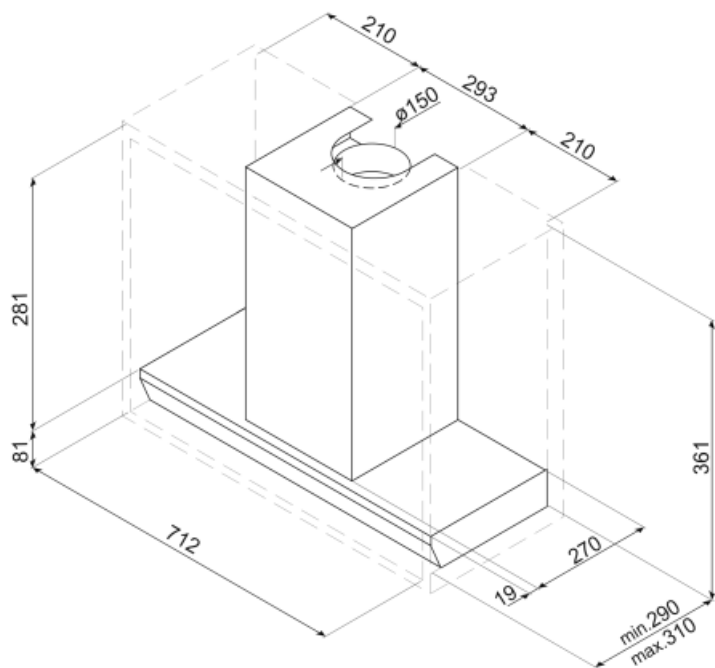

## Not included accessories

---














**KITFCGT74**



**KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary (TT)

-  24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.
-  Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
-  Warning light(s): to advise when filters need changing.
-  Intensive/turbo setting: when extra fast extraction is required.
-  Dimmering Lights
-  V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.
-  A: Product drying performance, measured from A+++ to D / G depending on the product family
-  Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
-  Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
-  Connection between hob and hood
-  Tunable white from warm to cold