


# SI3842B



Product Family  
Built-in  
Dimensions  
Power supply  
Type  
EAN code

Hob  
Ultra-low profile  
80 cm  
Electric  
Induction  
8017709161439

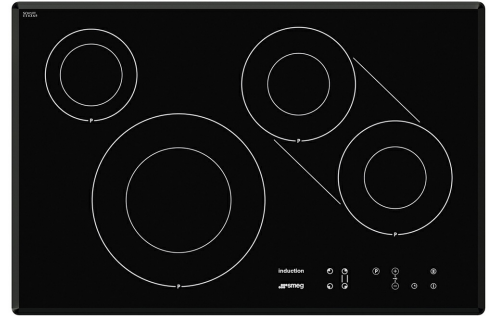

## Aesthetics



|                         |               |
|-------------------------|---------------|
| Aesthetics              | Universal     |
| Colour                  | Black         |
| Finishing               | Glass         |
| Material                | Glass         |
| Glass Type              | Ceramic       |
| Glass edge              | Angled edge   |
| Type of control setting | Touch control |
| Slider                  | Red           |
| Control knobs position  | Front         |
| Serigraphy colour       | Grey          |

## Programs / Functions



|                                   |     |
|-----------------------------------|-----|
| Total no. of cook zones           | 4   |
| No. of induction cook zones       | 4   |
| No. of cooking zones with booster | 4   |
| Main on/off switch                | Yes |
| Power levels                      | 9   |

## Options



Flexible Zone Type      Bridge

|                          |            |                                      |     |
|--------------------------|------------|--------------------------------------|-----|
| <b>Standard cut out</b>  | 480x730 mm | <b>End of cooking acoustic alarm</b> | Yes |
| <b>End cooking timer</b> | 4          | <b>Residual time indicator</b>       | Yes |
| <b>Minute minder</b>     | 1          | <b>Control Lock / Child Safety</b>   | Yes |
|                          |            | <b>Bridge option</b>                 | Yes |

## Technical Features




Front left - Induction - giant - 2.60 kW - Booster 3.70 kW - Ø 28.0 cm  
 Rear left - Induction - single - 1.40 kW - Booster 2.20 kW - Ø 14.5 cm  
 Rear right - Induction - single - 1.80 kW - Booster 3.00 kW - Ø 18.0 cm  
 Front right - Induction - single - 1.80 kW - Booster 3.00 kW - Ø 18.0 cm

|   |     |   |     |
|---|-----|---|-----|
| <b>Automatic setting according to pan dimension</b> | Yes | <b>Automatic switch off when overflow</b>     | Yes |
| <b>Automatic pan detection</b>                      | Yes | <b>Residual heat indicator</b>                | Yes |
| <b>Minimum pan diameter indication</b>              | Yes | <b>Protection against accidental start up</b> | Yes |
| <b>Automatic switch off when overheat</b>           | Yes |   |     |

## Electrical Connection

|                          |           |                                  |                         |
|--------------------------|-----------|----------------------------------|-------------------------|
| <b>Nominal power (W)</b> | 7400 W    | <b>Type of electric cable</b>    | Single and Double phase |
| <b>Current</b>           | 33 A      | <b>Frequency (Hz)</b>            | 50/60 Hz                |
| <b>Voltage (V)</b>       | 220-240 V | <b>Power supply cable length</b> | 150 cm                  |
| <b>Voltage 2 (V)</b>     | 380-415 V | <b>Terminal Box</b>              | 6 poles                 |

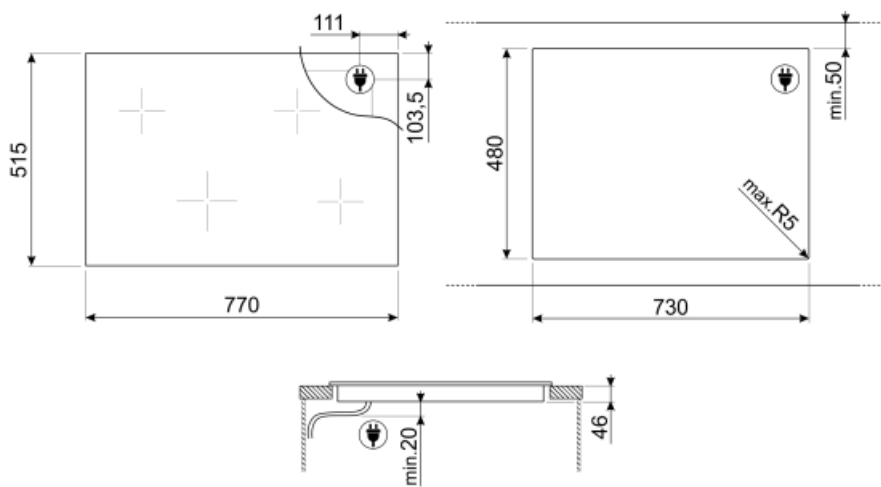

## Not included accessories

---



### TPK













Stainless steel grill plate to cook  
Teppanyaki dishes



### SCRP

Induction and ceramic hobs and  
teppanyaki scraper

## Symbols glossary

|  |   |   |   |
|--|---|---|---|
|    | Power booster: option allows the zone to work at full power when very intense cooking is necessary.                     |    | Ultra-low profile: Installation of product with flat edge - height of 1 mm.   |
|    | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.      |    | Giant zone: The giant zone offers extra space and flexibility.  |
|    | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |    | Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.  |
|    | Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.       |    | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |
|    | Time elapsed: shows how long the cooking zone has been in use.  |    | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.  |
|  | TWIN_ZONE_72dpi   |  | Touch control   |