

KCV9NE2



Product family	Hood
Hood Type	Decorative wall hood
Design	Angled
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
Type of steel	Brushed
EAN code	8017709257194



Aesthetics




Aesthetics	Linea	Glass Type	Black
Colour	Black	Serigraphy colour	Grey
Finishing	Glass	Logo	Embossed

Controls



Control setting	Touch control	Display	Yes
Led colour	Ice		

Programs / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	

Technical Features



No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	Stainless steel
Light power	1 W		

Dimmer mode	Yes	Filter replacement indicator	Yes
Light colour temperature scale (°K)	4000 °K	Vent outlet	150 mm
Free outlet maximum capacity	815 m³/h	Minimum distance from GAS hob	467 mm
Motor power	275 W	Minimum distance from ELECTRIC hob	467 mm
		Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	218	42
Speed 2	322	63
Speed 3	600	65
Intensive speed	734	70

Performance / Energy Label


Annual Efficiency Consumption (AEC_{hood})	60 kWh/year	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE_{max})	65 dB(A)
Energy efficiency class (EEC)	B	Airborne acoustical A-weighted sound power emission at boost speed (SPE_{boost})	72 dB(A)
Fluid Dynamic Efficiency (FDE)	28,6	Power Consumption in Off mode (P_o)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	1
Lighting Efficiency (LE)	99,1 lux/W	Energy Efficiency Index per first cavity	57,4
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Q_{bep})	384 m³/h
Grease Filtering Efficiency (GFE)	42,2 %	Measured air pressure at best efficiency point (Q_{bep})	428 Pa
Grease Filtering Efficiency Class (GFEC)	G	Measured electric power input at best efficiency point (W_{bep})	160 W
Air flow at minimum speed (Q_{min})	218 m³/h	Normal Power of the light system (W_I)	2 W
Maximum extraction rate	600 m³/h	Average illumination of the light on the cooking surface (E_{middle})	218 lux
Intensive extraction rate	734 m³/h	Sound power level at highest setting (L_{wa})	65 dB(A)
Airborne acoustical A-weighted sound Power Emission at minimum speed (SPE_{min})	42 dB(A)		

Electrical Connection


Nominal power	278 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1000 mm

Also available

Alternative colours available	White, Silver Glass	Available colours	KCV9BE2 - KCV9SE2
-------------------------------	---------------------	-------------------	-------------------

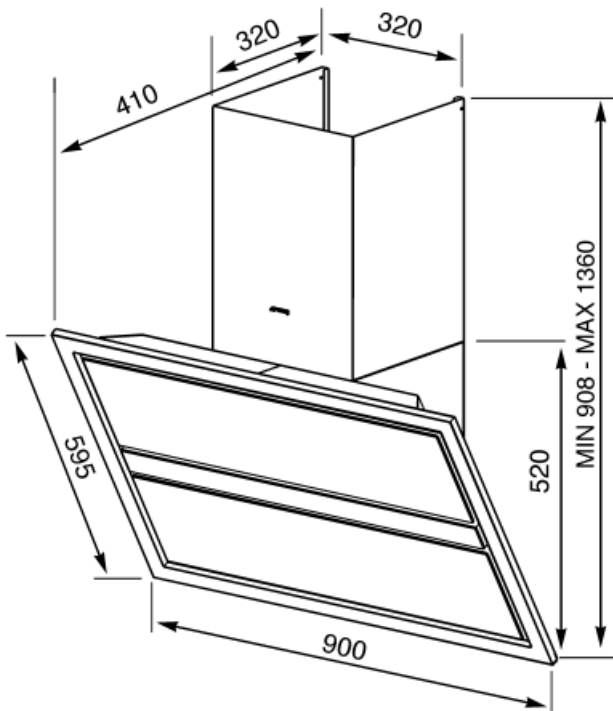


Not included accessories



KITFC906

Charcoal filter Kit 1 piece



KITFTS












Stainless steel box + Charcoal filter Kit
1 piece



KITALLFC

Universal Charcoal filter Stainless Steel
AISI 304 The filter can be washed in
dishwasher 50 °C (water and suitable
detergent) and to dry it put in the oven
180°C 25 minutes

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		B: Product energy rating, measured from A+++ to D / G depending on the product family.
	LED display: to show programmes, functions and options selected and the time to the end of the cycle.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Perimeter extraction panels: very efficient and aid noise reduction.
	Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.		Intensive/turbo setting: when extra fast extraction is required.
	...		