

# KSET56LX3

|                   |                        |
|-------------------|------------------------|
| Product family    | Hood                   |
| Hood Type         | Integrated (semi) hood |
| Design            | Visible front panel    |
| Extraction        | Extraction             |
| Material          | Stainless steel        |
| Type of steel     | Brushed                |
| EAN code          | 8017709333638          |
| Aesthetic         | Universale             |
| Colour            | Stainless steel        |
| Finishing         | Satin                  |
| Glass Type        | Clear                  |
| Serigraphy colour | Black                  |
| Logo              | Silk screen            |



## Controls

|                 |        |
|-----------------|--------|
| Control setting | Slider |
|-----------------|--------|

## Program / Functions

|               |   |
|---------------|---|
| No. of speeds | 3 |
|---------------|---|

## Technical Features

|                                                                                    |                                                                                     |                                    |           |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------|-----------|
|  |  |                                    |           |
| No. of lights                                                                      | 2                                                                                   | No. of filters                     | 1         |
| Light type                                                                         | LED                                                                                 | Anti-grease filters                | Aluminium |
| Light Power                                                                        | 6 W                                                                                 | Vent outlet                        | 120 mm    |
| Light color temperature scale (°K)                                                 | 2700 °K                                                                             | Minimum distance from GAS hob      | 650 mm    |
| Free outlet maximum capacity                                                       | 237 m³/h                                                                            | Minimum distance from ELECTRIC hob | 500 mm    |
| Motor power                                                                        | 75 W                                                                                |                                    |           |

|         | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|---------|----------------------------------|----------------------------------|
| Speed 1 | 132                              | 44                               |
| Speed 2 | 165                              | 43                               |

|            |     |    |
|------------|-----|----|
| Speed<br>3 | 230 | 53 |
|------------|-----|----|

## Accessories included

|                |     |
|----------------|-----|
| Tube reduction | Yes |
|----------------|-----|

## Performance / Energy Label




|                                          |            |
|------------------------------------------|------------|
| Annual Efficiency Consumption (AEChood)  | 49 kWh/a   |
| Energy efficiency class (EEC)            | C          |
| Fluid Dynamic Efficiency (FDE)           | 8.4        |
| Fluid Dynamic Efficiency class (FDEC)    | E          |
| Lighting Efficiency (LE)                 | 20.1 lux/W |
| Lighting Efficiency Class (LEC)          | B          |
| Grease Filtering Efficiency (GFE)        | 65.1 %     |
| Grease Filtering Efficiency Class (GFEC) | D          |
| Air flow at minumum speed (Qmin)         | 130 m³/h   |
| Air flow at maximum speed (Qmax)         | 225 m³/h   |

|                                                                                 |          |
|---------------------------------------------------------------------------------|----------|
| Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin) | 47 dBA   |
| Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)   | 55 dBA   |
| Time increase factor (F)                                                        | 1.7      |
| Energy Efficiency Index                                                         | 84.1     |
| Measured air flow rate at best efficiency point (Qbep)                          | 135 m³/h |
| Measured air pressure at best efficiency point (Pbep)                           | 160 Pa   |
| Measured electric power input at best efficiency point (Wbep)                   | 72 W     |
| Nominal Power consumption of the light system (WL)                              | 6 W      |
| Average illumination of the light on the cooking surface (Emiddle)              | 121 lux  |
| Sound power level at highest setting (Lwa)                                      | 55 dBA   |

## Electrical Connection

|                              |             |                           |          |
|------------------------------|-------------|---------------------------|----------|
| Plug                         | Not present | Frequency (Hz)            | 50-60 Hz |
| Electrical connection rating | 81 W        | Power supply cable length | 1500 mm  |
| Voltage                      | 220-240 V   |                           |          |

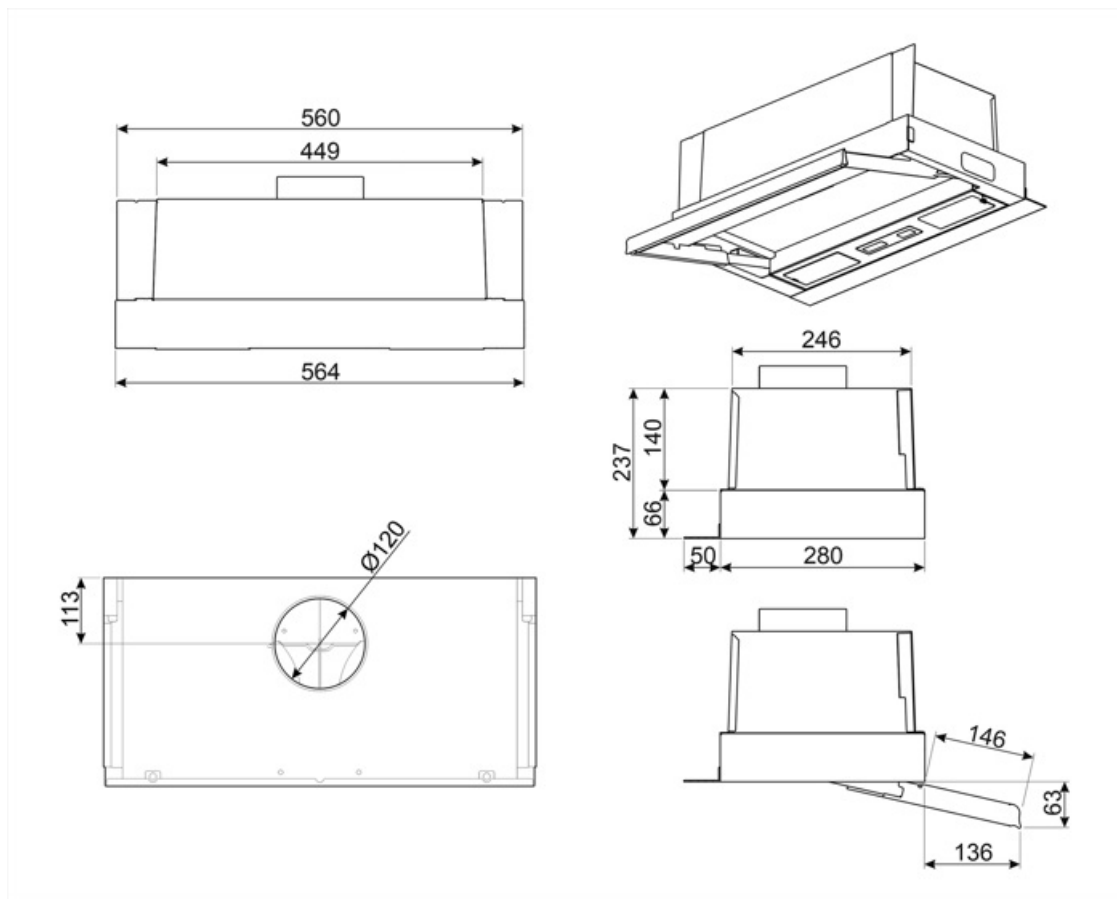

---

## Compatible Accessories

---

KITFC62

Charcoal filter round (kit 2 pieces)



---

## Symbols glossary

---



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.