

KSGT64X

Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709328320
Hood width	60 cm








Aesthetics

Aesthetic Colour	Universale Stainless steel	Finishing Logo	Satin Embossed
------------------	-------------------------------	----------------	-------------------

Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

Programme / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	
V-Condense System	

Technical Features

    	No. of lights	2	No. of filters	2
	Light type	LED	Anti-grease filters	Stainless steel

Light Power	2,3 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature range	2700° - 4000° °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	500 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	235	48
Speed 2	418	62
Speed 3	574	68
Intensive speed	626	70

Performance / Energy Label

B	Annual Efficiency Consumption (AEChood)	52 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	69 dB(A)
	Energy efficiency class (EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dB(A)
	Fluid Dynamic Efficiency (FDE)	29,0	Power consumption in stand-by mode (Ps)	0,49 W
	Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	1,0
	Lighting Efficiency (LE)	78,5 lux/W	Energy Efficiency Index	57
	Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	308 m³/h
	Grease Filtering Efficiency (GFE)	72,0 %	Measured air pressure at best efficiency point (Pbep)	448 Pa
	Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	132 W
	Air flow at minumum speed (Qmin)	235 m³/h	Nominal Power consumption of the light system (WL)	5 W
	Air flow at maximum speed (Qmax)	574 m³/h	Average illumination of the light on the cooking surface (Emiddle)	361 lux
	Air flow at boost speed (Qboost)	626 m³/h	Sound power level at highest setting (Lwa)	69 dB(A)
	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dB(A)		

Electrical Connection

Electrical connection rating
Voltage


280 W

220-240 V

Frequency (Hz)
Power supply cable length

50-60 Hz

1500 mm

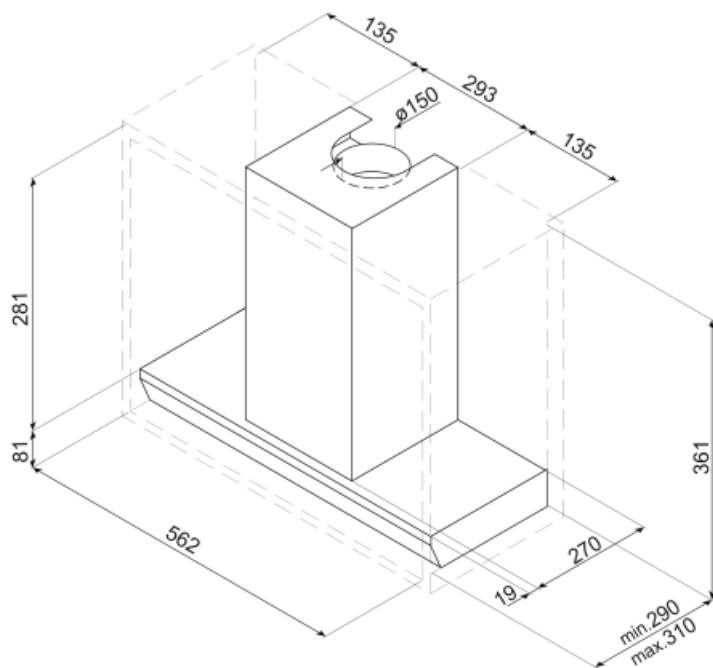

Not included accessories














KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCGT64

Symbols glossary (TT)

- | | | | |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |  | B: Product energy rating, measured from A+++ to D / G depending on the product family. |
|  | Warning light(s): to advise when filters need changing. |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  | Intensive/turbo setting: when extra fast extraction is required. |  | Connection between hob and hood |
|  | Dimming Lights |  | Tunable white from warm to cold |
|  | V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use. | | |